

492 Series Regulator

*Single Stage
Piston-Sensed
Ultra-High
Pressure
Chrome-Plated
Brass Barstock Body*



492-5952 shown

The 492 Series regulators are intended for primary pressure control of non-corrosive gases at a maximum inlet pressure of 6000 PSIG.

Typical Applications

- Airplane strut charging
- Research and development laboratories
- Chemical manufacturing
- Aerospace hydraulic systems
- Pharmaceutical manufacturing
- Gauge calibration

Advanced Features

- Chrome-plated brass barstock body
Smooth surface finish
- Front and rear panel mountable
Versatile system configuration
- Pressure ranges 0-750 to 0-6000 PSIG
Broad range of applications
- Six-port design
Flexible installation alternatives

Features

- *Large piston sensor*
Safely control pressures to 6000 PSIG
- *Capsule® seat*
Increased serviceability and life
- *Low wetted surface area*
Minimal purge requirements
- *Field-adjustable pressure limit*
Safeguard downstream equipment

Materials

Body
Chrome-plated brass barstock

Bonnet
Chrome-plated brass barstock

Seat
PCTFE (3000 and 4500 PSIG inlet)
Arlon® (PEEK) (6000 PSIG inlet)

Piston
Brass barstock

Filter
10 micron sintered brass

Internal Seals
Viton®

Specifications

Maximum Inlet Pressure
6000 PSIG (420 BAR)

Temperature Range
-40°F to 140°F (-40°C to 60°C)




Gauges
2½" diameter chrome-plated brass

Ports
¼" FPT

Cv
0.1

Weight (492-4851-680)
5.59 lbs. (2.54 kg)

Flow Performance Curves

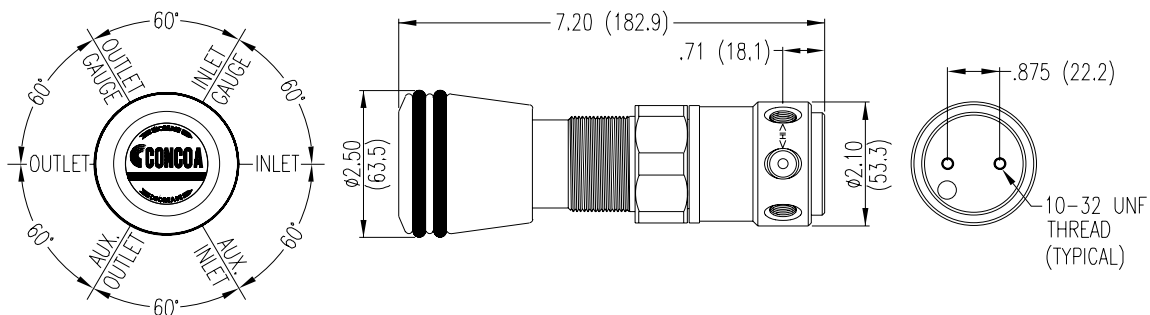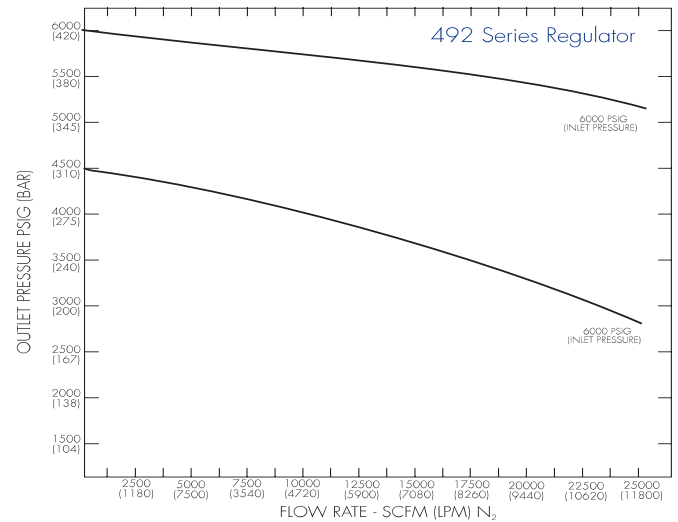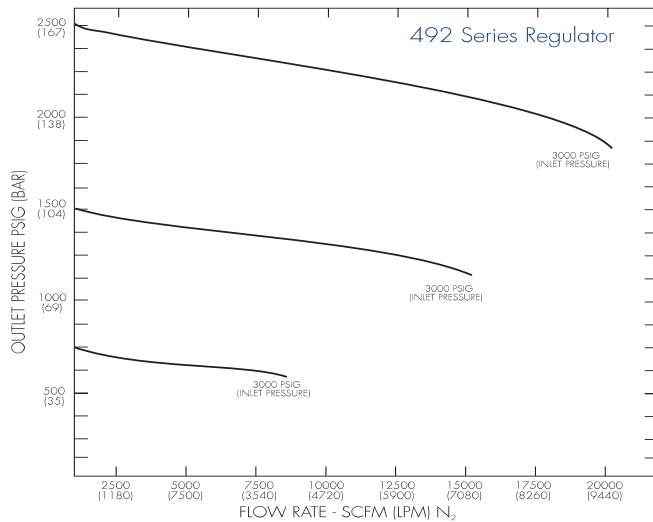

Ordering Information *(For information about how to use this table please see page 4.)*

492-	A		B		C	D	-Inlet	Options
Series 492	Outlet Pressure 1: 0-750 2: 0-1500 3: 0-2500 4: 0-4500* 5: 0-6000† 6: 0-3500*	Outlet Gauge 0-1000 PSIG 0-4000 PSIG 0-4000 PSIG 0-6000 PSIG 0-10,000 PSIG 0-6000 PSIG	Inlet Maximum 0: 6000 PSIG 3: 3000 PSIG 8: 5500 PSIG 9: 6000 PSIG	Inlet Gauge None 0-4000 PSIG 0-6000 PSIG 0-10,000 PSIG	Outlet Assemblies 0: ¼" FPT 1: ¼" MPT 2: ¼" Tube 5: Needle Valve ¼" MPT 6: ⅛" Tube 7: ⅜" Tube M: 6mm Tube	Assembly/ Gauges 0: Bare Body* 1: Standard Assembly (PSIG/kPa Gauges) 2: Standard Assembly (BAR/PSIG Gauges)	Inlet Connections CGA DIN 477 BS 341 and others available	Installed Options A: Protocol Alarm Station (110V) B: Protocol Alarm Station (220V) C: Protocol Switchover Station G: Protocol Switchover Station with Alarm (110V) H: Protocol Switchover Station with Alarm (220V) M: Protocol Station
		*Not available with 3000 PSIG maximum inlet pressure						
		†Only available with 6000 PSIG maximum inlet pressure						
Related Options			• Panel Mount Kit (830-6483)					